


Routing		
	Standard	Option
Routing tool for FR4 materials	2.0 mm	0.6 mm – 3.0 mm (scale by 0.1 mm)
Routing tool for IMS materials	2.0 mm	1.0 mm; 1.5 mm; 3.0 mm
Clearance	0.2 mm	0.15 mm
3D milling tolerance	0.1 mm	
Minimum core for semi-flex PCB	0.2 mm	

Routing tabs – Gatema


Standard tab

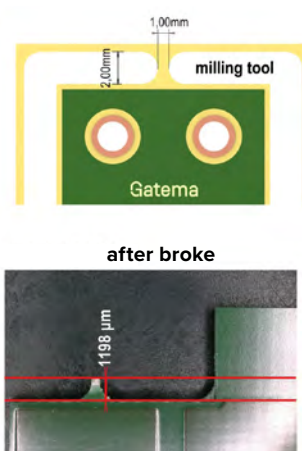

after broke

1198 µm

Perforated tab

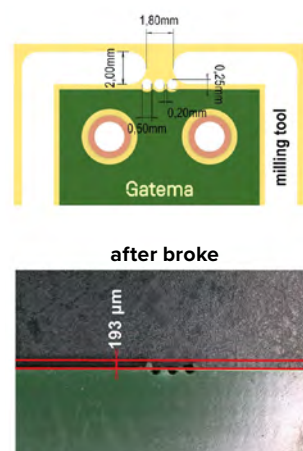

after broke

193 µm